

F-073

(12) UK Patent Application (10) GB (11) 2 217 136 (13) A
(43) Date of A publication 18.10.1988

(21) Application No 8812253.3

(22) Date of filing 24.06.1988

(30) Priority data

(31) 8808148

(32) 07.04.1988

(33) GB

(71) Applicant

Delco Products Overseas Corporation

(Incorporated in the USA - Delaware)

3944 West Grand Boulevard, Detroit, Michigan 48202,
United States of America

(72) Inventor

Trevor Bates

(74) Agent and/or Address for Service

M J Denton

Patent Section (F5), Vauxhall Motors Ltd, PO Box 2,
Kington Road, Luton, Bedfordshire, LU2 6SV,
United Kingdom(51) INT CL⁴

H03H 7/01

(52) UK CL (Edition J)

H3U UOF U10BX

U19 S1820 S2047

(56) Documents cited

None


(58) Field of search

UK CL (Edition J) H2A ABF ATM, H3U UOF

INT CL⁴ H03H

(54) Radio interference suppression

(57) An arrangement for the suppression of radio interference in an electric motor (10) having at least two brushes (11, 13, 15), the arrangement comprising a high frequency interference suppression circuit and a low frequency interference suppression circuit, the high frequency interference suppression circuit comprising a ferrite bead (24, 26) which surrounds a portion of a lead (36, 38) connectable to one (11, 13) of the brushes, and a capacitor (28, 30) which is capable of self resonance in the high frequency band, and the low frequency interference suppression circuit comprising a capacitor (32, 34). Also disclosed are an isolating element between the low frequency and high frequency suppression circuits and separate grounds for each circuit for reducing the interaction between the high frequency and the low frequency suppression circuits.

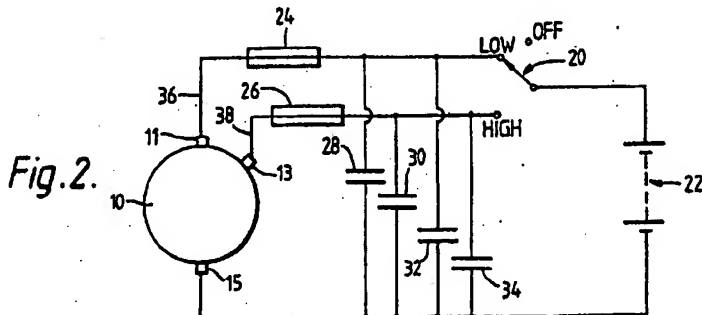

GB 2 217 136 A

Fig. 1.

PRIOR ART.

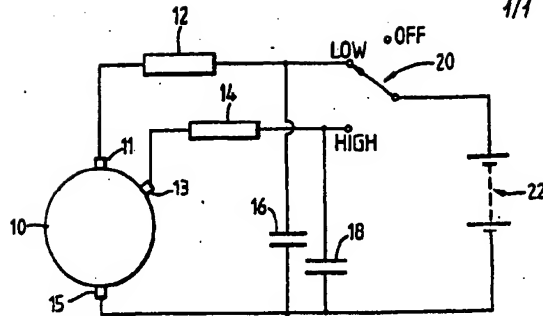


Fig. 2.


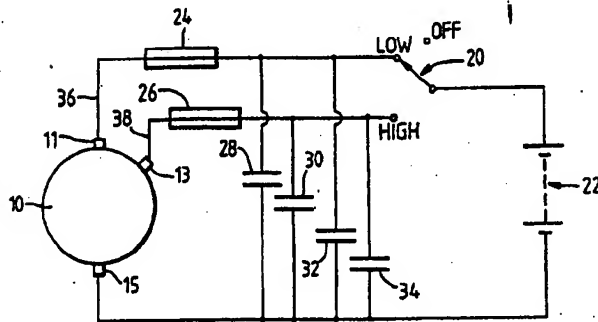


Fig. 3.

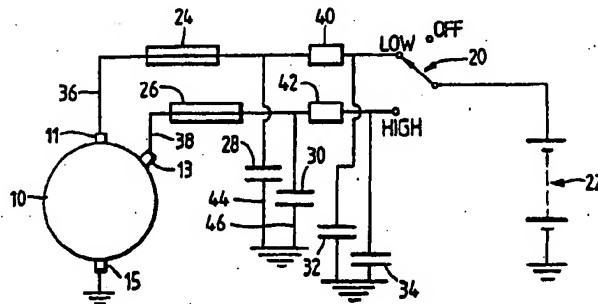

RADIO INTERFERENCE SUPPRESSION

This invention relates to an arrangement for the suppression of radio interference from electric motors, and in particular from electric motors having automotive applications such as in windscreen wiper circuits and heater blower circuits. These electric motors generate electrical noise because of the sparking at the brush/commutator interface. This electrical noise is coupled to the motor vehicle radio receiver by radiation, conduction, or common impedance coupling, causing interference with radio reception.

It is usual practice to include suppression circuit elements with the wiring elements for electric motors which reduce or eliminate interference noise on the radio receiver. These circuit elements usually consist of inductors and capacitors which attenuate the noise voltage, but have little or no effect on the d.c. supply voltage to the electric motor. Because of their construction it is not possible to use only a simple inductor or capacitor to attenuate the noise voltage at all frequencies. For example, a capacitor which can attenuate the noise voltage in the lower radio frequency bands (AM band) of 140 KHz to 1.6 MHz has little or no effect in the higher radio frequency bands (FM band) of 86 MHz to 108MHz. The capacitor may even cause the noise voltage to increase at frequencies other than those for which it is designed to suppress. This problem occurs because the capacitor can resonate with other circuit elements at certain frequencies causing noise peaks in other radio frequency bands. This interaction between circuit elements is a common problem which limits the use of cost effective components for interference suppression.

Further, it is also the usual practice to use wire wound chokes as the inductors, and to mount these chokes, inside the housing of the electric motor, with the capacitors connected in the wiring circuit which connects the electric motor to the d.c. supply voltage. The use of chokes as inductors, and the positioning of the capacitors does not lend itself to automatic assembly of the suppression circuit elements.

It is an object of the present invention to provide an arrangement for radio interference suppression which has a cost advantage over previously known arrangements, and which lends itself to automatic assembly.

An arrangement in accordance with the present invention for the suppression of radio interference in an electric motor having at least two brushes comprises a high frequency interference suppression circuit and a low frequency interference suppression circuit, the high frequency interference suppression circuit comprising a ferrite bead which surrounds a portion of a lead connectable to one of the brushes, and a capacitor which is capable of self resonance in the high frequency band, and the low frequency interference suppression circuit comprising a capacitor.

Preferably the low frequency interference suppression circuit includes an additional inductance/high impedance element which is capable of isolating the capacitor of the low frequency interference suppression circuit at high frequencies.

Where the high and low frequency interference suppression circuits are connected to ground, preferably the ground connections are isolated from one another.

The high and low frequency interference suppression circuits are preferably mounted on a printed circuit board, and a predetermined length of track of the printed circuit board preferably defines the additional inductance/high impedance element when present.

The present invention also comprises an electric motor, preferably for automotive applications, having an arrangement as herein described for radio interference suppression.

The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a circuit diagram illustrating a typical previously known arrangement;

Figure 2 is a circuit diagram illustrating an arrangement in accordance with a first embodiment of the present invention for suppression of radio interference from an electric motor; and

Figure 3 is an alternative circuit diagram illustrating an arrangement in accordance with a second embodiment of the present invention.

Referring to Figure 1, there is shown a standard electric motor 10 having three brushes 11, 13, 15 for high speed and low speed operation. Brush 15 is a common brush for low speed brush 11 and high speed brush 13. The circuit elements comprise two inductors 12, 14 in the form of wire-wound chokes; two capacitors 16, 18; a switch 20 having three positions, OFF, LOW and HIGH; and a battery 22 for supplying a d.c. supply voltage to the electric motor 10. Inductor 12 and capacitor 16 provide radio interference suppression for the low speed operation of the electric motor 10; and inductor 14 and capacitor 18 provide radio interference suppression

for the high speed operation of the electric motor. The inductors 12, 14 give a high impedance path for the higher frequencies, thereby providing radio interference suppression for the FM band. The
5 capacitors 16, 18 give a low impedance path for the lower frequencies, thereby providing radio interference suppression for the AM band.

In the arrangement shown in Figure 2, the electric motor 10, switch 20, and battery 22 are as
10 shown in Figure 1. In this arrangement, however, the wire wound chokes have been replaced by ferrite beads 24, 26 and capacitors 28, 30. The ferrite beads 24, 26 (which surround leads 36, 38) have the effect of increasing the inductance of the leads 36, 38, which
15 are connected to the brushes of the electric motor 10, and so perform as an inductor. However, this in itself is not sufficient to attenuate the noise voltage to an acceptable level, so extra capacitors 28, 30 are required. The frequency response of the
20 ferrite beads 24, 26 is relatively flat, with little or no resonance. The value of the capacitors 28, 30 is therefore chosen such that they self resonate at about 100 MHz (around the mid-point of the FM band). The ferrite beads 24, 26 contribute to this resonance
25 to give a wider bandwidth of attenuation (preferably of at least 35dB) to provide suppression over the whole of the FM band.

Capacitors 32, 34 which are used for radio interference suppression at lower frequencies can,
30 however, (as they are connected in parallel with capacitors 28, 30) have an effect on the resonance on the capacitors 28, 30 causing a loss of attenuation, and a change in the resonant frequency of the capacitors 28, 30. This effect is due to the
35 inductive effect of the capacitors 32, 34 and the

leads connected thereto which can reduce the Q and bandwidth, causing a reduction in the attenuating properties of the ferrite beads 24, 26/capacitors 28, 30 circuit.

5 As a further improvement to the present invention, therefore, the capacitors 32, 34 are effectively isolated from the ferrite beads 24, 26/capacitors 28, 30 circuit as shown in Figure 3. In this arrangement, the ferrite beads 24, 26/capacitors 10 28, 30 circuit (which define a high frequency interference suppression circuit) are grounded separately from the capacitors 32, 34 (which define a low frequency interference suppression circuit). Further, an additional inductive/high impedance 15 element 40, 42 is included which minimises the effective loading of the capacitors 32, 34 on the ferrite beads 24, 26/capacitors 28, 30 circuit, and thereby effectively isolates the capacitors 32, 34 from the high frequency interference suppression 20 circuit.

By providing separate grounds, common impedance coupling between the capacitors 28, 30 and 32, 34 is reduced.

At high frequencies the additional 25 inductance/high impedance elements 40, 42 are preferably such as to present an inductive reactance of 200 ohms, effectively isolating the capacitors 32, 34 (which typically have an impedance of 20 ohms at high frequency) from the low impedance (approximately 30 3 ohms) presented by the resonating ferrite beads 24, 26/capacitors 28, 30 circuit. This allows the value of capacitors 28, 30 to be kept low, thereby increasing the attenuation. The length of the leads 44, 46 between the capacitors 28, 30 and ground is 35 preferably kept as short as possible to ensure

impedance is kept to a minimum.

In an example of the arrangement in Figure 3, the circuit is assembled on a printed circuit board. Capacitors 32, 34 are 1 microfarad capacitors having a wound or stacked foil construction. Capacitors 28, 30 are 470 pF ceramic plate capacitors. Ferrite beads 24, 26 are 16 mm long and 6 mm in diameter. The additional inductance/high impedance elements 40, 42 is provided by a predetermined length of track on the printed circuit board. This arrangement allows automatic assembly of the circuit. When used with, for example, a two speed windscreen wiper motor, the printed circuit board can be mounted within the housing of the motor with the capacitors 32, 34 connected on one side to the ground for the common brush 15 of the motor, and the capacitors 28, 30 connected on one side to the ground provided by the housing of the motor.

Using the present invention, the size of the capacitors 32, 34 for low frequency interference suppression can be reduced over previously known arrangements, hence reducing cost; the use of ferrite beads is considerably cheaper than wire-wound chokes; and the present invention lends itself to automatic assembly.

Claims

1. An arrangement for the suppression of radio interference in an electric motor having at least two brushes, the arrangement comprising a high frequency interference suppression circuit and a low frequency interference suppression circuit, the high frequency interference suppression circuit comprising a ferrite bead which surrounds a portion of a lead connectable to one of the brushes, and a capacitor which is capable of self resonance in the high frequency band, and the low frequency interference suppression circuit comprising a capacitor.
2. An arrangement as claimed in Claim 1, wherein the low frequency interference suppression circuit further comprises an additional inductive/high impedance element which is capable of isolating the capacitor of the low frequency interference suppression circuit at high frequencies.
3. An arrangement as claimed in Claim 1 or Claim 2, wherein the high and low frequency interference suppression circuits are connected to ground, and the ground connections are separated from one another.
4. An arrangement as claimed in any one of Claims 1 or 3, wherein the high and low frequency interference suppression circuits are mounted on a printed circuit board.
5. An arrangement as claimed in Claim 4 including an additional inductive/high impedance element in the low frequency interference suppression circuit, wherein the additional inductive/high impedance element comprises a predetermined length of track on the printed circuit board.

7. An electric motor having an arrangement
5 as claimed in any one of Claims 1 to 6 connected
thereto for providing radio interference suppression.

Published 1988 at The Patent Office, Great House, 86/91 High Holborn, London WC1N 6DT. Further copies may be obtained from The Patent Office.
GNS00001: +08 33171540/0000, St Mary Cray, Croydon, Kent CR5 3SD. Printed by 1001print, 1001printers Ltd, St Mary Cray, Kent, CM. 187

Fig. 1.

PRIOR ART.

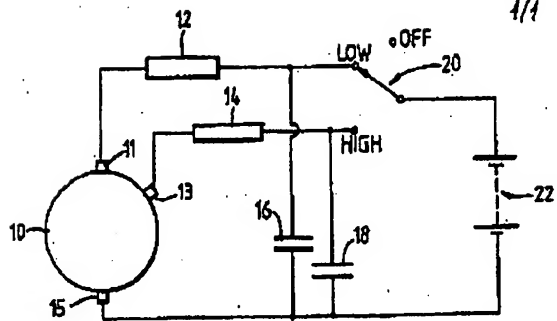


Fig. 2.


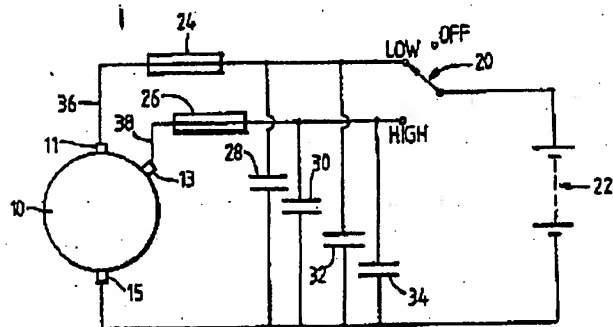


Fig. 3.

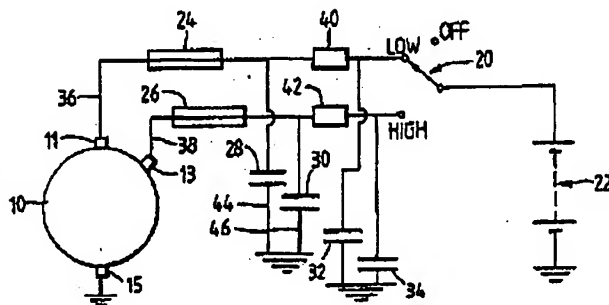

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.